

p2.3 Surface Landing Site Weather Analysis for NASA's Constellation Program

Karen M. Altino¹, K. Lee Burns, Ph.D.²

¹Jacobs/Jacobs ESTS Group

²Raytheon/Jacobs ESTS Group

NASA Marshall Space Flight Center, Huntsville, Alabama

1.0 Introduction

Weather information is an important asset for NASA's Constellation Program in developing the next generation space transportation system to fly to the International Space Station, the Moon and, eventually, to Mars. Weather conditions can affect vehicle safety and performance during multiple mission phases ranging from pre-launch ground processing of the Ares vehicles to landing and recovery operations, including all potential abort scenarios. Meteorological analysis is an important contributor, not only to the development and verification of system design requirements but also to mission planning and active ground operations. Of particular interest are the surface weather conditions at both nominal and abort landing sites for the manned Orion capsule. Weather parameters such as wind, rain, and fog all play critical roles in the safe landing of the vehicle and subsequent crew and vehicle recovery. The Marshall Space Flight Center (MSFC) Natural Environments Branch has been tasked by the Constellation Program with defining the natural environments at potential landing zones. This paper will describe the methodology used for data collection and quality control, detail the types of analyses performed, and provide a sample of the results that can be obtained.

2.0 Data Source

Climatological time series of operational surface weather observations are used to calculate probabilities of occurrence of various sets of hypothetical vehicle constraint thresholds. Hourly surface observations are available through the National Climatic Data Center (NCDC) archived database website (www.ncdc.noaa.gov/oa/ncdc.html). NCDC is part of the Department of Commerce, National Oceanic and Atmospheric Administration (NOAA), and the National Environmental Satellite, Data and Information Service (NESDIS). NCDC archives weather data obtained by the National Weather Service (NWS), Military Services, the Federal Aviation Administration (FAA), and voluntary cooperative observers. The data is edited and quality-controlled, taken primarily by 10 meter (m) standard-height wind towers at various locations around the country and worldwide. There are more than twenty different types of hourly measurements, with time recorded in coordinated universal time (UTC) mode. The overall period of record (POR) for the database dates back to 1901 and remains current. However, the POR and types of measurements taken hourly for each site varies based on when the instrumentation was established, for what purpose the site uses the data, and if the instrumentation is still in use today.

3.0 Methodology

3.1 Application of available data sets

As the Constellation Program and Orion Project focus on potential land landing zones, data is collected and the analyses are completed for each site or network of sites. As an example, three sites in the western United States will be analyzed as these sites have lakebeds that have the potential to be landing options. These sites include:

- Carson Sink, Nevada
- Edwards Air Force Base, California
- Utah Test and Training Range, Utah

However, sometimes weather instrumentation is not readily available close enough to a chosen zone to provide a representative set of weather data. In such cases, a weather tower closest to the zone is chosen based on proximity to the site(s) of interest, the quality of the data, and the validity of the POR. Table 3.1 shows where the data was collected from to run the analyses for the three example landing sites.

LANDING SITE	DATA SITE	DISTANCE BETWEEN SITES (in kilometers)
Carson Sink	Fallon Naval Air Station	44
Edwards Air Force Base	EAFB-Rogers Lakebed	n/a
Utah Test & Training Range	Wendover Auxiliary Field	67

Table 3.1 Location of landing and data sites and approximate distance between the two.

Analysis results provide statistical descriptions of how often certain weather conditions are observed at the site(s) and the percentage of time the specified criteria thresholds are matched or exceeded. Outputs can be tabulated by month and hour of day to show both seasonal and diurnal variation. Of particular interest is horizontal wind speeds at the surface. Horizontal wind speed is a concern as it can affect how the vehicle reacts within the last 18-30 meters before impact with a landing surface. For this reason, wind values are sometimes analyzed at different heights based on the need to look at a particular area of interest. Since standard wind tower data “surface” measurements are taken at an altitude of 10m, a wind profile power law must be used to extrapolate surface values to varying heights. For example, to find the equivalent wind value at the 61m level, the following neutral-stability formula can be used,

$$u(z) = u_{10} \left(\frac{z}{10} \right)^{\frac{1}{7}}, \quad (1)$$

where $u(z)$ is the wind speed at height z meters above natural grade (0 to 300m AGL), and u_{10} is the wind speed at 10m.

Wind analyses can be performed for each site individually and in combination as multi-site network configurations for the three example sites. For the individual site analyses, the following abbreviations will be used and refer to the following data sets:

- CAR: Carson Sink, NV
 - Data set used: Fallon Naval Air Station, NV
 - POR: 01/1951 – 05/2006

- EAFB: Edwards Air Force Base Cuddeback Lake, CA
 - Data set used: Edwards Air Force Base Rogers Lakebed, CA
 - POR: 12/1941 – 03/2007
- UTTR: Utah Test & Training Range, UT
 - Data set used: Wendover Auxiliary Field
 - POR: 08/1942 – 09/2006

4.0 Example Analysis and Results

4.1 Single Site Results

Hourly, monthly, and annual average availabilities were calculated for the three example sites for mean and peak wind speed criteria. Values are in units of meters per second (m/s) unless otherwise noted. Availability percentage values mean that, for a given wind speed threshold, the wind speed did not equal or exceed that value that percentage of the time.

4.1.1 Annual averages

Figures 4.1 and 4.2 are example outputs showing the annual average availability percentage for the three example landing sites. Analysis was performed to look at wind speed threshold criteria in increments of 2 m/s for both mean (Figure 4.1) and peak (Figure 4.2) wind speeds. Overall availability increases as the wind speed threshold is increased. Peak wind speeds greatly influence availability. As an example, for an 8 m/s threshold, the worst-case site of EAFB has a mean wind speed availability of nearly 90% but only 70% peak wind speed availability for the same threshold value.

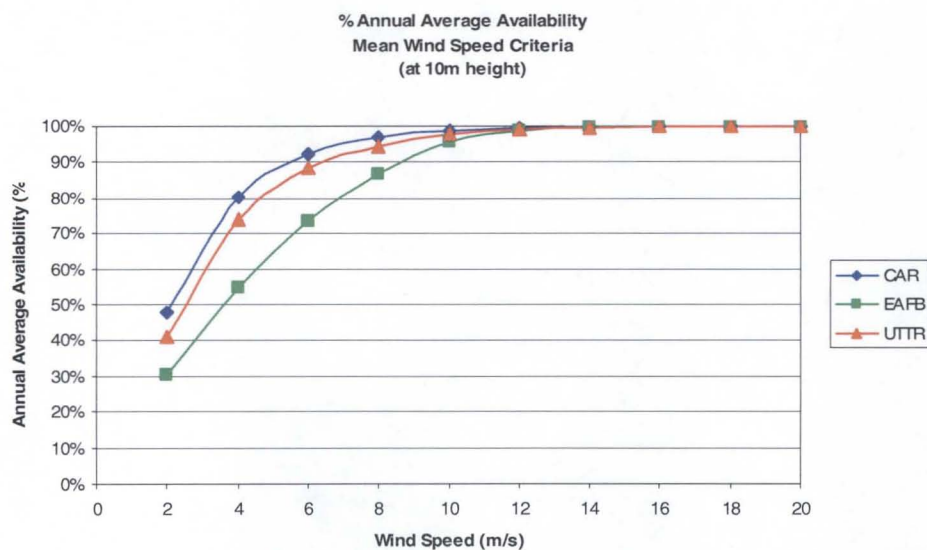


Figure 4.1 Annual average availabilities for mean wind speed thresholds of 0 to 20 m/s at 10m (surface).

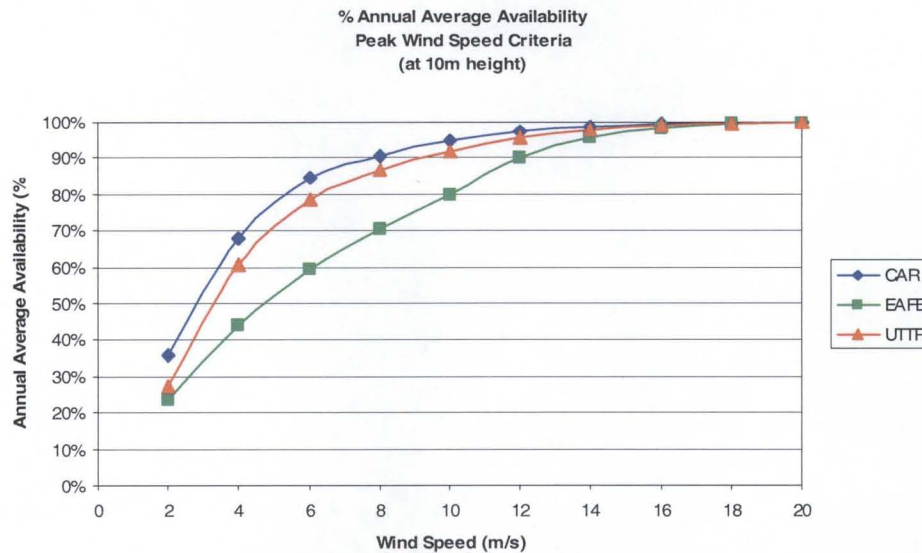


Figure 4.2 Annual average availabilities for peak wind speed thresholds of 0 to 20 m/s at 10m (surface).

4.1.2 Monthly averages

Outputs can be tabulated to show monthly average availabilities for individual sites or multi-site configurations. Looking at monthly averages in comparison to the annual average provides information on seasonal effects throughout the POR. In Tables 4.1 through 4.3 below, the monthly wind availabilities for CAR, EAFB, and UTTR – respectively – are represented. Mean wind availabilities are represented by the green tables (left) and peak wind availabilities are represented by the orange (right) tables for each site. For all sites, availability values tend to be lower during the spring and early summer months than any other time of year as weather events during the warmer months trigger higher wind events.

% MONTHLY AVERAGE AVAILABILITY							
MEAN WIND SPEED (m/s)							
	2	4	6	8	10	12	14
JAN	59%	85%	94%	97%	99%	100%	100%
FEB	51%	81%	92%	97%	99%	99%	100%
MAR	42%	74%	89%	95%	98%	99%	100%
APR	40%	72%	88%	95%	98%	99%	100%
MAY	38%	74%	89%	96%	99%	100%	100%
JUN	40%	77%	91%	97%	99%	100%	100%
JUL	43%	83%	95%	98%	100%	100%	100%
AUG	49%	86%	96%	99%	100%	100%	100%
SEP	54%	87%	96%	99%	100%	100%	100%
OCT	60%	88%	96%	99%	100%	100%	100%
NOV	60%	87%	96%	99%	100%	100%	100%
DEC	61%	85%	94%	97%	99%	100%	100%

% MONTHLY AVERAGE AVAILABILITY							
PEAK WIND SPEED (m/s)							
	2	4	6	8	10	12	14
JAN	47%	76%	88%	93%	96%	98%	100%
FEB	40%	70%	85%	90%	94%	97%	99%
MAR	31%	62%	79%	86%	92%	96%	99%
APR	29%	59%	77%	85%	92%	96%	99%
MAY	26%	59%	79%	87%	93%	97%	100%
JUN	28%	62%	82%	89%	94%	98%	100%
JUL	30%	68%	88%	93%	97%	99%	100%
AUG	35%	73%	91%	95%	98%	99%	100%
SEP	40%	75%	91%	95%	98%	99%	100%
OCT	47%	79%	91%	95%	97%	99%	100%
NOV	48%	78%	90%	95%	97%	99%	100%
DEC	49%	77%	88%	92%	96%	98%	100%

Table 4.1 Monthly average availability for CAR.

% MONTHLY AVERAGE AVAILABILITY							
MEAN WIND SPEED (m/s)							
	2	4	6	8	10	12	14
JAN	48%	74%	85%	93%	97%	99%	100%
FEB	38%	66%	81%	91%	97%	99%	100%
MAR	26%	53%	72%	86%	95%	99%	100%
APR	19%	42%	64%	82%	93%	98%	100%
MAY	16%	36%	60%	80%	93%	99%	100%
JUN	13%	34%	61%	82%	94%	99%	100%
JUL	15%	41%	70%	88%	98%	100%	100%
AUG	20%	49%	75%	91%	98%	100%	100%
SEP	32%	61%	82%	93%	98%	100%	100%
OCT	38%	69%	84%	94%	98%	100%	100%
NOV	43%	73%	85%	93%	98%	99%	100%
DEC	48%	75%	86%	93%	97%	99%	100%

% MONTHLY AVERAGE AVAILABILITY							
PEAK WIND SPEED (m/s)							
	2	4	6	8	10	12	14
JAN	40%	64%	77%	84%	90%	95%	99%
FEB	32%	55%	70%	79%	86%	93%	99%
MAR	20%	41%	58%	69%	79%	89%	98%
APR	15%	31%	48%	61%	73%	86%	98%
MAY	12%	26%	42%	56%	70%	85%	98%
JUN	10%	23%	41%	56%	71%	86%	99%
JUL	11%	26%	49%	65%	79%	92%	100%
AUG	15%	34%	57%	71%	84%	94%	100%
SEP	25%	48%	67%	79%	88%	95%	100%
OCT	30%	57%	74%	82%	90%	96%	100%
NOV	34%	62%	77%	83%	89%	95%	99%
DEC	40%	66%	79%	85%	90%	95%	99%

Table 4.2 Monthly average availability for EAFB.

% MONTHLY AVERAGE AVAILABILITY							
MEAN WIND SPEED (m/s)							
	2	4	6	8	10	12	14
JAN	60%	85%	92%	96%	99%	99%	100%
FEB	52%	81%	90%	95%	98%	99%	100%
MAR	36%	70%	85%	93%	97%	99%	100%
APR	28%	61%	80%	90%	96%	98%	100%
MAY	25%	62%	83%	92%	97%	99%	100%
JUN	24%	62%	84%	93%	97%	99%	100%
JUL	27%	66%	88%	95%	98%	99%	100%
AUG	31%	71%	89%	96%	98%	100%	100%
SEP	39%	77%	91%	96%	99%	100%	100%
OCT	49%	83%	92%	97%	99%	100%	100%
NOV	54%	82%	91%	96%	98%	99%	100%
DEC	59%	84%	92%	96%	98%	99%	100%

% MONTHLY AVERAGE AVAILABILITY							
PEAK WIND SPEED (m/s)							
	2	4	6	8	10	12	14
JAN	45%	77%	88%	92%	95%	97%	99%
FEB	37%	71%	84%	89%	93%	96%	99%
MAR	25%	56%	75%	83%	89%	94%	99%
APR	18%	46%	67%	77%	85%	92%	98%
MAY	16%	44%	69%	80%	88%	94%	99%
JUN	15%	44%	70%	81%	89%	94%	99%
JUL	16%	47%	74%	86%	92%	96%	99%
AUG	20%	52%	77%	87%	93%	97%	99%
SEP	27%	61%	82%	89%	94%	97%	99%
OCT	35%	71%	86%	91%	95%	97%	99%
NOV	39%	73%	85%	90%	94%	97%	99%
DEC	44%	76%	87%	91%	94%	97%	99%

Table 4.3 Monthly average availability for UTTR.

4.2 Multi-site Network Analyses

Sites can also be grouped together, correlated, and analyzed for a common availability. To perform multi-site network availability calculations, all possible network site configurations are analyzed. Landing availability is computed with respect to surface weather for month and hour of day for each network configuration and wind speed threshold. In order to correlate sites, it has to be determined which times have coincident measurements at all network sites. For each month and hour of day, the network availability is calculated using

$$P = \left(1 - \frac{N_{Fail}(h, m)}{N_{Total}(h, m)} \right) \times 100\% \quad , \quad (2)$$

where $N_{Total}(h, m)$ is the total number of coincident measurement periods and $N_{Fail}(h, m)$ is the number of measurement periods where one or more constraints were violated at all network sites. The formula is then iterated over a range of wind speed threshold values. As long as one site within the network configuration was available, the network is considered available. If all sites fail, then the network is unavailable.

4.2.1 Network annual availabilities

For the three example sites, Figure 4.3 shows all two-site combinations and the three-site combination network mean wind speed availabilities. Figure 4.4 shows peak wind speed

availabilities for the same configurations. Combined together, the three-site network configuration has an overall better availability than any of the two-site combinations. Though individual sites may have low availabilities, as seen in section 4.1, availability improves as sites are combined together. The more sites available for nominal or abort landing attempts, the better the probability of being able to land at at least one site in the network.

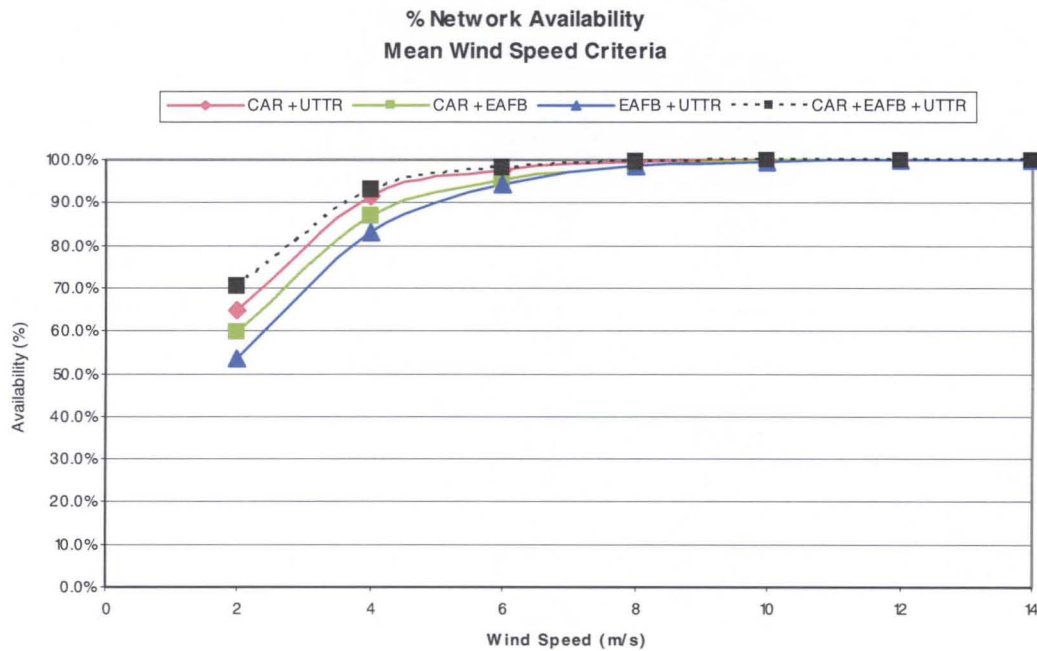


Figure 4.3 CAR-EAFB-UTTR network availabilities for mean wind speed thresholds of 0 to 14 m/s. The dotted line represents the three-site network configuration.

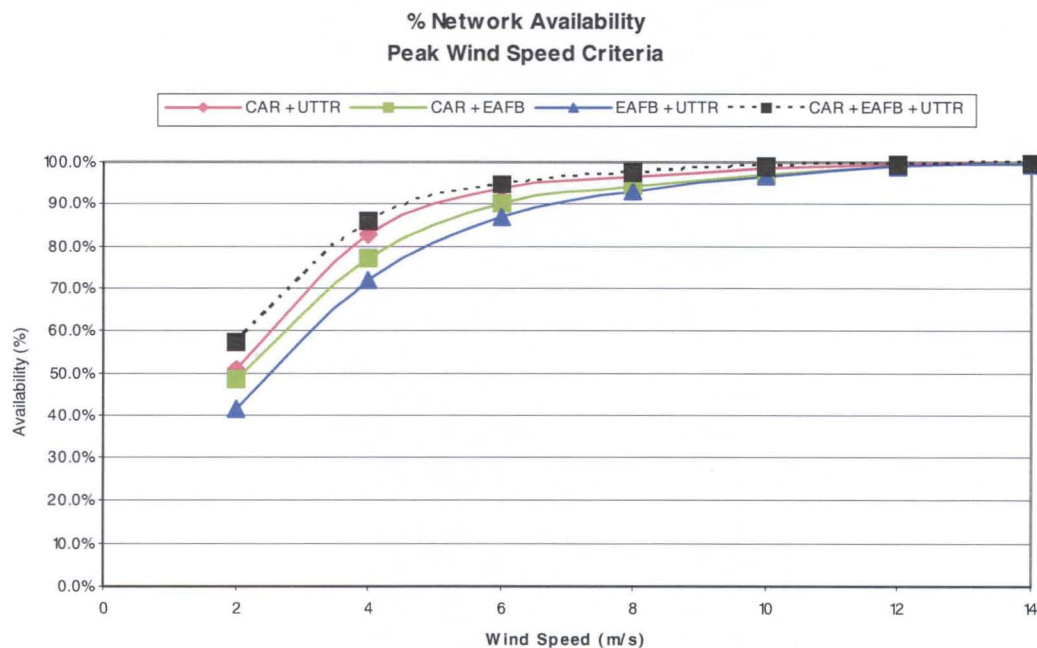


Figure 4.4 CAR-EAFB-UTTR network availabilities for peak wind speed thresholds of 0 to 14 m/s. The dotted line represents the three-site network configuration.

4.2.2 Worst time of day availabilities

Analyses can also be performed to look at the worst time of day availabilities when weather is occurring that could affect operations. Certain times of day tend to have a higher likelihood of precipitation and high wind events caused by diurnal effects. For example, for the three-site network, the worst availability tends to occur in the afternoon. Knowing that, the analysis can be focused on those worst hours for each month. In the example below, the hours were converted from UTC time to local time for each site. The weather criteria analyzed included looking at peak wind speed thresholds at the 10m height and whether precipitation and/or thunderstorms were present at the site at the time of the observation. Network availabilities were then calculated for the worst five hours of the day (from 12pm through 5pm local time). Table 4.4 shows the average availability over those five hours for the example three-site network for each month and distributed for the peak wind speed thresholds shown. Afternoons in the late spring/early summer months yield the lowest probability that the vehicle would be able to land somewhere within the network of sites. Information such as this can be critical to the Constellation Program when evaluating potential launch and landing scenarios for the Orion vehicle.

NETWORK: CAR-EAFB-UTTR												
Average probability (%) that network is available due to lack of wind speed constraint violation, thunderstorms, or precip for worst time of day (12pm thru 5pm local standard time) @ 10m height												
Peak Wind Speed Constraint (m/s)	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2	62.8	50.1	32.9	26.7	20.6	22.5	25.6	31.1	38.5	49.8	55.5	62.8
4	88.3	82.8	68.9	60.8	58.7	61.4	69.0	74.8	80.0	85.6	86.4	87.5
6	94.6	92.0	84.8	81.0	83.8	87.6	93.8	95.0	94.1	94.2	94.3	94.5
8	96.6	94.6	89.8	86.6	88.9	92.2	96.3	96.9	96.5	96.1	96.9	96.5
10	98.2	97.1	94.7	92.6	94.3	96.6	98.6	98.9	98.4	98.2	98.5	98.1
12	99.3	98.8	97.9	97.2	97.8	98.7	99.6	99.7	99.7	99.4	99.4	99.4
14	99.9	99.6	99.5	99.2	99.5	99.7	100.0	100.0	100.0	99.8	99.7	99.7
16	99.9	99.9	99.8	99.8	99.9	99.9	100.0	100.0	100.0	100.0	99.8	100.0

Table 4.4 CAR-EAFB-UTTR average worst time of day network availabilities for the afternoon hours of 12pm through 5pm local time. Availability was generated based on both weather (precipitation/thunderstorm presence) and peak wind speed criteria.

4.3 Ponding Effects

Soil conditions at the surface can also affect the landing and recovery phases of a mission. Natural environment affects, such as rain and snow melt, can cause standing water – referred to as “ponding” – to occur on sites such as lakebeds out west. On the east coast, an abort can cause a vehicle to land in shallow water or along the beach where there is wet sand. If surface conditions are not nominal, this can have an affect on how a vehicle lands and/or how the crew and vehicle can be recovered.

As surface soil conditions deteriorate, wind speeds become more significant as the vehicle might need to land in a low-wind environment. For example, a vehicle would want to approach muddy or water-covered surfaces slower so that it does not land in a way that would cause tipping or tumbling. The graphs below show the availabilities for the three-site network if ponding correction factors are applied during the month(s) of ponding at each site. Choosing

months for each site as representative ponding months, a ponding correction factor was applied to each site as follows:

- CAR: April, May
- EAFB: January, February, March, December
- UTTR: May

Based on this information, the analyses can be conducted on peak wind speed thresholds by applying some uncertainty value – or ponding correction factor – to the wind speeds during the months of concern. [Note: to show how a small change can affect the availability, this analysis is shown in values of feet per second (fps) and conducted at the 61m height rather than at the surface.] Figure 4.5 shows the availability if no correction factor is applied. Figure 4.6 represents the availability if a 15 fps correction factor is applied during the estimated months of ponding. Taking weather conditions into account (presence of precipitation and/or thunderstorms) for both runs, Figure 4.6 shows that reducing the wind speed for ponding greatly affects the overall availability of the individual networks.

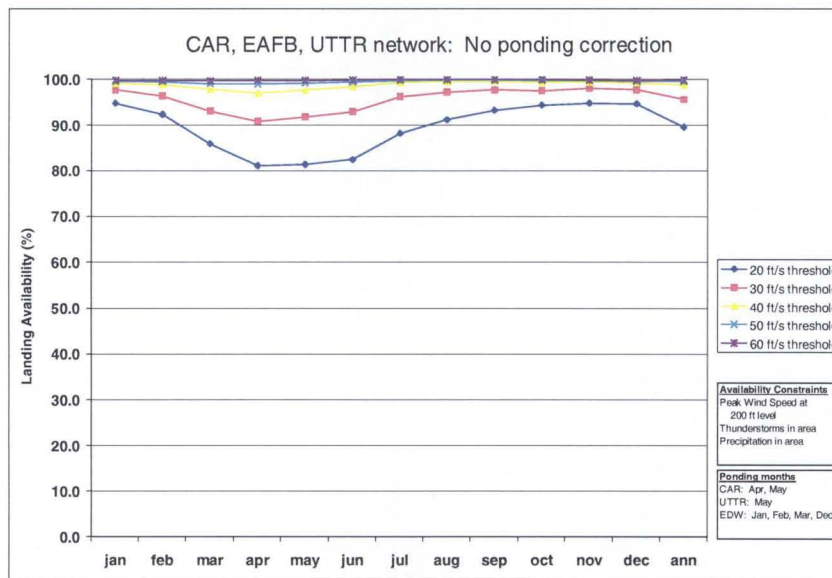


Figure 4.5 Availability for the example three-site network with no ponding correction factor applied.

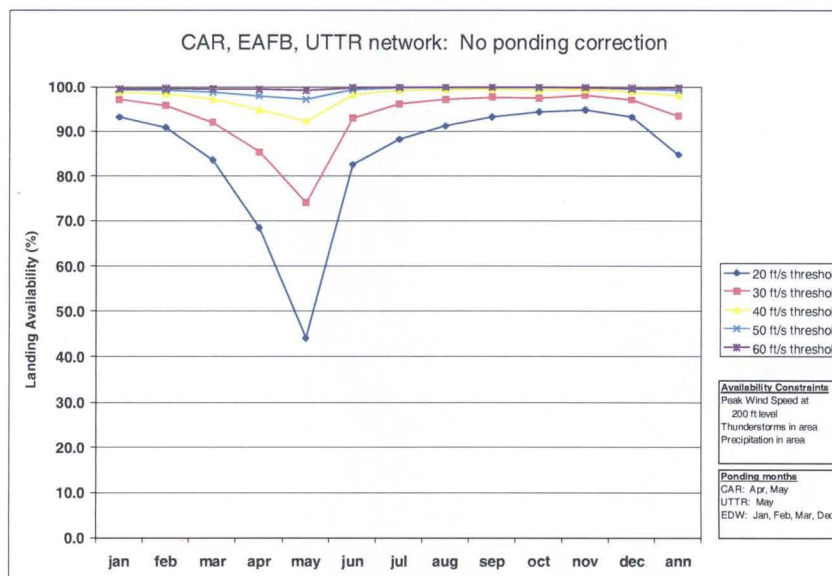


Figure 4.6 Availability for the example three-site network with a 15 fps correction factor applied.

5.0 Discussion

Looking at how the natural environment can affect vehicle design and safety is an important role for the Natural Environment Branch at MSFC. The data analyzed feeds back into program requirements, decisions, design, and eventually operations. Weather information is critical to multiple mission phases of the new Ares and Orion vehicles including pre-launch operations, launch operations, landing, recovery, and more. Looking at how the weather affects landing availabilities alone gives insight into just how important of a role weather can play. The different surface weather parameters – either alone or in combination with one another – can affect landing sites that might be available, how the vehicle will react as it descends and touches down, and what conditions recovery teams may have to deal with to get to the crew and vehicle. As the Constellation Program moves forward, more questions will arise as to how weather will affect new design applications and requirements. Forward work continues to be discussed and planned for the Natural Environments Branch as NASA moves closer to building and launching the Ares and Orion vehicles.

6.0 References

- Merceret, F.J., 1995: The effect of sensor spacing on wind measurements at the Shuttle Landing Facility. NASA Tech. Paper 3529, 58 pp.
- Merceret, F.J. and J.G. Ward, 2006: *Spatial properties of wind differences in the lowest three kilometers of the atmosphere*. Poster P10.8, Twelfth AMS Conference on Aviation and Range Meteorology, Atlanta, GA, 29 January - 2 February 2006.
- NASA-HDBK-1001, "Terrestrial Environment (Climatic) Criteria Handbook for Use in Aerospace Vehicle Development," Marshall Space Flight Center, August 11, 2000.
- Oram, T., 2007: Wind speed forecast accuracy for Orion Trade Study. White Paper, 8 pp.
- Wilks, D. S., 2006: Review of Probability. *Statistical Methods in the Atmospheric Sciences*, 2nd ed. Academic Press, 627 pp.

p2.3 Surface Landing Site Weather Analysis for NASA's Constellation Program

 Karen M. Altino ¹, K. Lee Burns, Ph.D. ²
¹ Jacobs/Jacobs ESTS Group

² Raytheon/Jacobs ESTS Group

NASA Marshall Space Flight Center, Huntsville, Alabama

INTRODUCTION

Weather information is an important asset for NASA's Constellation Program in developing the next generation space transportation system to fly to the International Space Station, the Moon and, eventually, to Mars. Weather conditions can affect vehicle safety and performance during multiple mission phases ranging from pre-launch ground processing to landing and recovery operations, including all potential abort scenarios. Of particular interest are the surface weather conditions at both nominal and abort landing sites for the manned Orion capsule. Weather parameters such as wind, rain, and fog all play critical roles in the safe landing of the vehicle and subsequent crew and vehicle recovery.

To look at surface weather conditions, data is obtained from the NOAA archived database at the National Climatic Data Center. Global surface observations are taken hourly and archived for wind towers all around the United States and world-wide. The data is quality controlled and the archive is easily accessible and user-friendly.


As an example, three sites in the western U.S. were chosen to show what type of analyses can be performed using surface observations. The three sites are Carson Sink (CAR), Nevada; Edwards Air Force Base (EAFB), California; and Utah Test and Training Range (UTTR) in Utah.



AVERAGE ANNUAL AVAILABILITIES

Outputs can be tabulated to show annual average availabilities for individual sites or multi-site networks. Standard wind tower measurements are taken at a height of 10m and in units of meters per second (m/s). Analyses are performed at this standard height unless otherwise specified. The value(s) can be extrapolated to varying heights using wind profile power laws.

In the example below, the three sites mentioned in the introduction were analyzed to look at wind speed threshold criteria in increments of 2 m/s for both mean (left) and peak (right) wind speeds. Overall availability increases as the wind speed threshold is increased. Peak wind speeds greatly influence availability. As an example, for an 8 m/s threshold, the worst-case site of EAFB has a mean wind speed availability of nearly 90% but only a 70% peak wind speed availability.

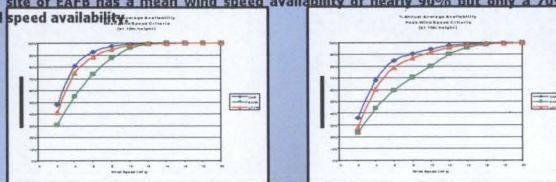

MULTI-SITE NETWORK AVAILABILITIES

In order to perform analyses for multi-site networks, the hourly surface weather observations must be correlated over all sites in the network. This is done by looking only at the hourly observations the sites have in common over a period of record. This can be done using the following formula:

$$P = \left(1 - \frac{N_{\text{fail}}(h, m)}{N_{\text{total}}(h, m)} \right) \times 100\%$$

where $N_{\text{total}}(h, m)$ is the total number of coincident measurement periods and $N_{\text{fail}}(h, m)$ is the number of measurement periods where one or more constraints were violated at all network sites.

The graphs below show the mean wind speed (left) and peak wind speed (right) availabilities for all two-site combinations and the three-site combination of the three example individual sites discussed previously. The dotted line represents the three-site network. Combined together, the three-site combination has an overall better availability than any of the two-site combinations. Therefore, the more sites available, the better the probability of being able to land at some site in that network.



WORST TIME OF DAY AVAILABILITIES

Analysis can be performed to look at the worst time of day availabilities for wind speed criteria. For example, for the three-site network, the worst availability values tended to occur in the afternoon. Knowing that, the analysis can be focused on those worst hours for each month.

In the example below, the hours were converted from UTC time to local time for each site. The peak wind speed availabilities at the 10m height was calculated over the worst five hours of the day – from 12pm through 5pm local time.

NETWORK: CAR-EAFB-UTTR												
Average probability (%) the network is available due to lack of wind speed constraint violation, thunderstorms, or precip for worst time of day (12pm thru 5pm local standard time @ 10m height)												
Peak Wind Speed Constraint	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2 m/s	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
4	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
6	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
8	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
10	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
12	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
14	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
16	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0

MONTHLY AVERAGE AVAILABILITIES

Outputs can be tabulated to show monthly average availabilities for individual sites or multi-site networks. Looking at monthly averages in comparison to the annual average allows the diurnal affects to clearly be shown. In the examples below, the monthly mean (left) and peak (right) wind availabilities show that the availability for the different wind speed thresholds tend to be worse during the early spring through mid-summer months than any other time of the year.

% MONTHLY AVERAGE AVAILABILITY (CAR)												
MEAN WIND SPEED (m/s)												
2	4	6	8	10	12	14	16	18	20	22	24	26
JAN	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
FEB	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
MAR	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
APR	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
MAY	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
JUN	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
JUL	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
AUG	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
SEP	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
OCT	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
NOV	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
DEC	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
ANNUAL	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0

% MONTHLY AVERAGE AVAILABILITY (EAFB)												
MEAN WIND SPEED (m/s)												
2	4	6	8	10	12	14	16	18	20	22	24	26
JAN	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
FEB	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
MAR	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
APR	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
MAY	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
JUN	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
JUL	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
AUG	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
SEP	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
OCT	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
NOV	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
DEC	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
ANNUAL	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0

% MONTHLY AVERAGE AVAILABILITY (UTTR)												
MEAN WIND SPEED (m/s)												
2	4	6	8	10	12	14	16	18	20	22	24	26
JAN	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
FEB	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
MAR	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
APR	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
MAY	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
JUN	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
JUL	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
AUG	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
SEP	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
OCT	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
NOV	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
DEC	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
ANNUAL	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0

Utah Test & Training Range

PONDING CORRECTION FACTORS

Soil conditions at the surface can also affect what wind speeds a vehicle can handle when landing. For example, a vehicle would want to approach muddy or water-covered surfaces slower so that it does not land in a way that would cause tipping or tumbling. The graphs below show the availabilities for the three-site network if ponding correction factors were applied during the month(s) of ponding at each site. The analyses were performed for peak wind values at 61m (200 feet). The graph on the left shows the availability if no correction factors were applied. The graph on the right shows a 15 foot per second correction factor applied. Taking weather conditions into account (presence of precipitation) for both runs, the graph on the right shows that reducing the wind speed for ponding greatly affects the overall availability of the individual networks.

